


# British Gypsum fixing products


High performance,  
maximum productivity

# British Gypsum fixing products

An essential part of our high performance systems, British Gypsum screws are designed for optimum fixing strength and reliability.

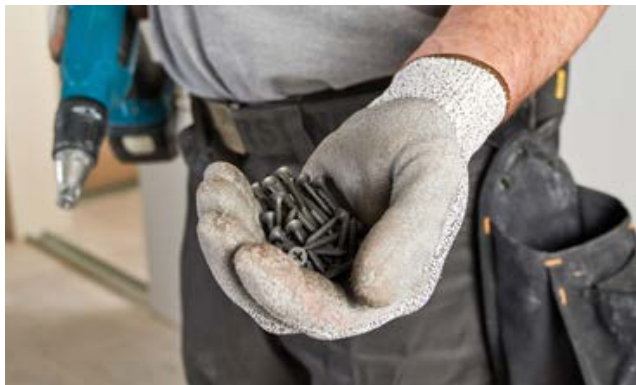

## British Gypsum fixings range



### Drywall Screws

Corrosion-resistant self-tapping zinc plated steel screws with countersunk cross head.


**Tip:** Self-tapping

**Head:** Countersunk cross

**Coating:** Zinc / Phosphate

**Application:** Plasterboard to metal framing less than 0.6mm gauge

**Available lengths (mm):** 22, 25, 32, 36, 42, 50, 60, 65, 75, 80, 90, 105



### Collated Drywall Screws

Strips of collated Drywall Screws supplied in boxes of 1000 screws (20 strips).


**Tip:** Self-tapping

**Head:** Countersunk cross

**Coating:** Zinc / Phosphate

**Application:** Plasterboard to metal framing less than 0.6mm gauge

**Available lengths (mm):** 25, 36, 42, 50



### Jack-Point Screws

Corrosion-resistant self-drilling zinc plated steel screws with countersunk cross head.


**Tip:** Self-drilling

**Head:** Countersunk cross

**Coating:** Zinc

**Application:** Plasterboard to metal framing  $\geq 0.8\text{mm}$  gauge and 'T' Studs  $\geq 0.6\text{mm}$  gauge

**Available lengths (mm):** 25, 35, 41, 60



### Drywall Timber Screws

Corrosion-resistant self-tapping zinc plated steel screws with countersunk cross head.


**Tip:** Self-tapping

**Head:** Countersunk cross

**Coating:** Zinc / Phosphate

**Application:** Plasterboard to timber framing

**Available lengths (mm):** 32, 38, 41, 51, 60, 65, 75, 85, 95, 105, 120



### Collated Drywall Timber Screws

Strips of 50 collated Drywall Timber Screws supplied in boxes of 1000 screws (20 strips).

**Tip:** Self-tapping

**Head:** Countersunk cross

**Coating:** Zinc / Phosphate

**Application:** Plasterboard to timber framing

**Available lengths (mm):** 38, 41, 51



### Wafer Head Drywall Screws

Corrosion-resistant self-drilling zinc plated steel screws with countersunk cross head.

**Tip:** Self-drilling

**Head:** Countersunk cross

**Coating:** Zinc

**Application:** Metal to metal less than 0.8mm gauge

**Available lengths (mm):** 13

## Specsure® lifetime system warranty

British Gypsum fixings form part of this unique “off the shelf” warranty to end users that confirms British Gypsum proprietary systems will perform to the parameters published in our current literature.



## To qualify for SpecSure®

Just specify and install British Gypsum Systems in line with recommendations in the current British Gypsum **White Book** available to download from [british-gypsum.com](http://british-gypsum.com)

The system must comprise only genuine branded British Gypsum components, tried and tested over many decades in some of the UK's most prestigious buildings. We cannot guarantee that the use of other manufacturers' components will meet our rigorous performance and quality standards when installed in our tested systems.

## Conformity to EN standards

British Gypsum fixings conform to *EN 14566*.

*EN 14566* is the European standard that specifies the characteristics and performance requirements of mechanical fasteners used for fixing gypsum plasterboard and specialist boards to timber and metal. The standard also specifies the requirements for fixings that may be used in the construction of metal framing and joining of metal components.



### Wafer Head Jack-Point Screws

Similar to British Gypsum Wafer Head Drywall Screws but featuring a self-drilling tip.


**Tip:** Self-tapping

**Head:** Wafer cross

**Coating:** Zinc

**Application:** Metal to metal framing  $\geq 0.8\text{mm}$  gauge or 'I' Studs  $\geq 0.6\text{mm}$  gauge

**Available lengths (mm):** 13



### Rigidur H Screws

Corrosion-resistant self-tapping zinc plated steel screws with countersunk cross heads.


**Tip:** Self-tapping

**Head:** Countersunk cross

**Coating:** Zinc

**Application:** Rigidur H board to metal framing less than 0.8mm gauge

**Available lengths (mm):** 30, 40



### Nailable Plugs

Combination of masonry nail and plastic wall fixing with expanding tip and countersunk head.


**Tip:** Nail

**Head:** Countersunk

**Coating:** Zinc

**Application:** Secondary fix for Gyproc ThermoLine laminates

**Available lengths (mm):** 60, 80, 100, 110, 120, 135



### Glasroc F FIRECASE Screws

Specifically designed for board-to-board fixing of Glasroc F FIRECASE board in the FireCase system, the screw have a unique head design that countersinks into the board allowing easy finishing.


**Tip:** Self-tapping

**Head:** Countersunk cross

**Coating:** Zinc

**Application:** Glasroc F FIRECASE board to metal framing

**Available lengths (mm):** 40, 50, 58, 70



### GypFloor SILENT Floor Screws

Providing support for the GypFloor SILENT acoustic floor system.


**Tip:** Self-tapping

**Head:** Countersunk cross

**Coating:** Zinc

**Application:** GypFloor SILENT

**Available lengths (mm):** 55



### High Performance Screws for use with Gyproc Habito

Specifically designed for use with Gyproc Habito; featuring a unique lipped head to ensure easy finishing.

**Tip:** Self-tapping

**Head:** Countersunk cross

**Coating:** Black phosphate

**Application:** Gyproc Habito board to metal framing sections  $< 0.8\text{mm}$  gauge and 'I' Studs  $\geq 0.6\text{mm}$  gauge; and to timber studs / supports

**Available lengths (mm):** 25, 35, 40, 50