

# *Fine Texture*




- » Clean textured bright white appearance
- » Good edge strength for handling
- » 90% humidity resistance
- » Lightly textured, modern surface finish
- » Durable, sanded face
- » Micro perforated for acoustic absorption

**MINERAL FIBRE**\_\_


+44 (0)1455 618 787  
enquiries@burgesscep.com  
Brookfield Road, Hinckley LE10 2LL  
Verulam Road, Stafford ST16 3EA

**WWW.BURGESSCEP.COM**

# Fine Texture

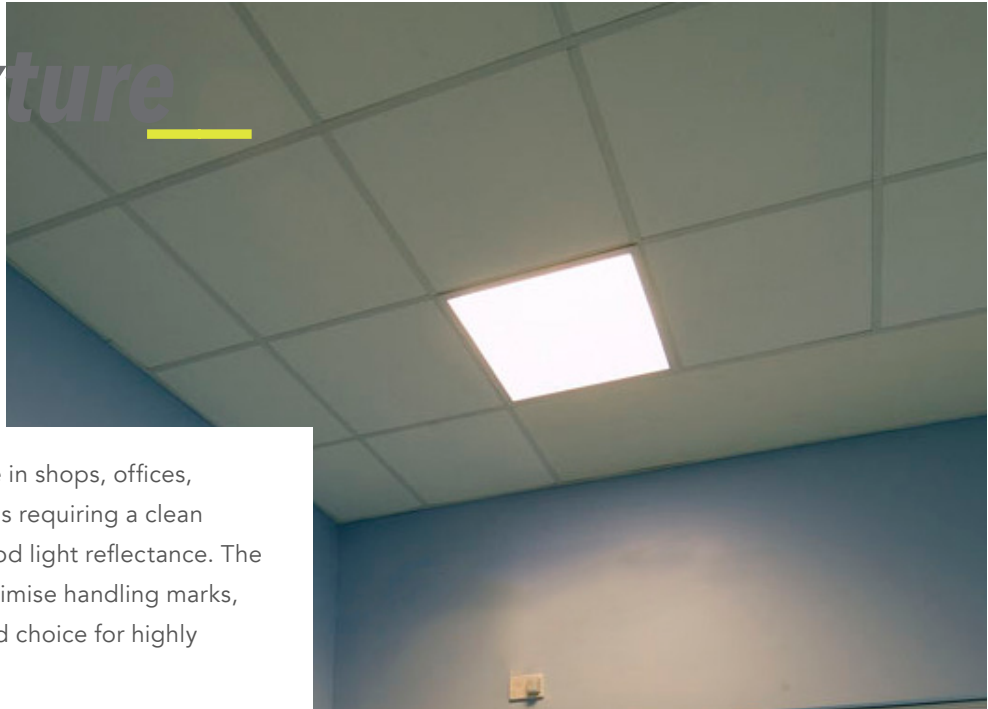


Fine Texture is ideal for use in shops, offices, hotels and high profile areas requiring a clean bright appearance with good light reflectance. The textured finish helps to minimise handling marks, making Fine Texture a good choice for highly accessed areas.

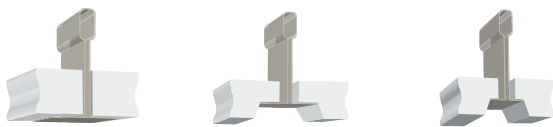

Module Size	Grid Panel	Standard Tegular	Fine Tegular
600x600	B1500	A1510	A1520
1200x600	B1501	-	-

Practical Absorption Coefficient

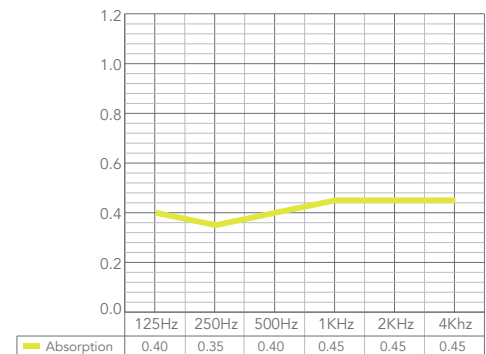

Sound absorption in accordance with ISO 354



## SOUND ABSORPTION

Class D in accordance with EN ISO 11654.  $\alpha_w$ : 0.45 in accordance with EN ISO 11654. Noise Reduction Coefficient (NRC): 0.45 in accordance with ASTM C 423-01.



## HUMIDITY RESISTANCE

Suitable in conditions up to 90% relative humidity at 25°C.



## CLEANING & HYGIENE

These tiles can be vacuum cleaned. Contact us for cleaning guidelines.



## SOUND ATTENUATION

34dB Dnc,w in accordance with BS EN ISO 717-1.



## PRODUCT WEIGHT

These tiles weigh approximately 3.5kg per m<sup>2</sup>.



## ACCESSIBILITY

These tiles are easily demounted.



## FIRE PERFORMANCE

Euroclass A2-s2, d0 in accordance with EN 13501-1.



## TILE LOADING

These tiles are not designed to support the weight of any services. Please contact us for grid loading data.



## ENVIRONMENTAL

These tiles are capable of being recycled, please contact us for full details.